

MAIN LINE BRANCH TERMINALS (HLAK)

HLAK 25 3/2 Type C - 3 pole



080130-0-X

MAINLINE (PER POLE)

2 x 25 mm² - 2,5 mm² (4 - 14 AWG)
16 mm² - 1,5 mm² (6 - 16 AWG)



- > modular system, module width 17,8 mm
- > user-defined stackable
- > to fit on DIN rail TS 35

BRANCHLINE (PER POLE)

2 x 16 mm² - 2,5 mm² (6 - 14 AWG)
10 mm² - 1,5 mm² (8 - 16 AWG)



AL / CU



080130-1-X



080130-5-X

For aluminium and copper conductors (Al/Cu)



NOMINAL VOLTAGE

1000 V AC/DC
1000 V AC/DC
600 V

NOMINAL CURRENT

152 A Cu
100 A Al
90 A Cu / 70 A Al

STANDARDS

IEC 60947-7-1
IEC 61238-1 (Class A)
UL-1059 / CSA C22.2 No.158-10



Model	Part No. *	Type	PU	GTIN / EAN
HLAK 25/16 for aluminium/ copper conductors	080130-0-3	HLAK 25/16 3/2 3L G	2/24	4051589013031
	080130-1-3	HLAK 25/16 3/2 L G/N/PE	2/24	4051589013130
	080130-5-3	HLAK 25/16 3/2 3L BSG	2/24	4051589013536

* Other colours/colour combinations available on request

For copper conductors (Cu)



NOMINAL VOLTAGE

1000 V AC/DC
690 V

NOMINAL CURRENT

152 A
100 A

STANDARDS


IEC 60947-7-1
DIN VDE 0603-2



Model	Part No. *	Type	PU	GTIN / EAN
HLAK 25/16 for copper conductors	080130-0-4	HLAK 25/16 3/2 3L G	2/24	4051589801300
	080130-1-4	HLAK 25/16 3/2 L G/N/PE	2/24	4051589801317
	080130-5-4	HLAK 25/16 3/2 3L BSG	2/24	4051589801355

* Other colours/colour combinations available on request

Power loss HLAk 25/16

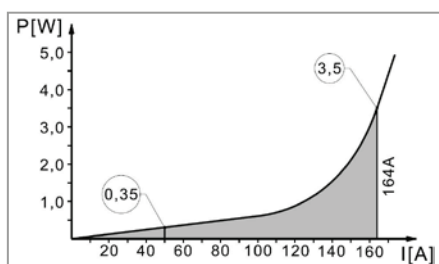

Dimensions:

