

HLAK 25 Type C - 4 pole



080140-0-X

MAIN LINE

2 x 25 mm² - 2,5 mm² (4 - 14 AWG)
16 mm² - 1,5 mm² (6 - 16 AWG)



BRANCH LINE

2 x 16 mm² - 2,5 mm² (6 - 14 AWG)
10 mm² - 1,5 mm² (8 - 16 AWG)



- > modular system, module width 17,8 mm
- > user-defined stackable
- > to fit on DIN rail TS 35



AL / CU



080140-1-X



080140-5-X



HLAK

For aluminium and copper conductors (Al/Cu)



NOMINAL VOLTAGE	NOMINAL CURRENT	STANDARDS
1000 V AC/DC	152 A Cu	IEC 60947-7-1
1000 V AC/DC	100 A Al	IEC 61238-1 (Class A)
600 V	90 A Cu / 70 A Al	UL-1059 / CSA C22.2 No.158-10

Model	Part No. *	Type	PU	GTIN / EAN
HLAK 25/16 for aluminium/ copper conductors	080140-0-3	HLAK 25/16 4L G	1/12	4051589014038
	080140-1-3	HLAK 25/16 3L G/N	1/12	4051589014137
	080140-5-3	HLAK 25/16 3L BSG/N	1/12	4051589014533

* Other colours/colour combinations available on request

For copper conductors (Cu)




NOMINAL VOLTAGE	NOMINAL CURRENT	STANDARDS
1000 V AC/DC	152 A	IEC 60947-7-1
690 V	100 A	DIN VDE 0603-2

Model	Part No. *	Type	PU	GTIN / EAN
HLAK 25/16 for copper conductors	080140-0-4	HLAK 25/16 4L G	1/12	4051589801409
	080140-1-4	HLAK 25/16 3L G/N	1/12	4051589801416
	080140-5-4	HLAK 25/16 3L BSG/N	1/12	4051589801454

* Other colours/colour combinations available on request

Power loss HLAk 25/16

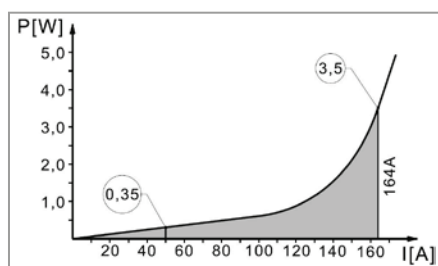

Dimensions:

