

MAIN LINE BRANCH TERMINALS (HLAK)

HLAK 25 Type C - 5 pole



080150-0-X

MAINLINE (PER POLE)

2 x 25 mm² - 2,5 mm²
16 mm² - 1,5 mm²



BRANCHLINE (PER POLE)

2 x 16 mm² - 2,5 mm²
10 mm² - 1,5 mm²



- > modular system, module width 17,8 mm
- > user-defined stackable
- > to fit on DIN rail TS 35



AL / CU



080150-3-X



080150-5-X

For aluminium and copper conductors (Al/Cu)



NOMINAL VOLTAGE

1000 V AC/DC
1000 V AC/DC

NOMINAL CURRENT

152 A Cu
100 A Al

STANDARDS

IEC 60947-7-1
IEC 61238-1 (Class A)



Model	Part No. *	Type	PU	GTIN / EAN
HLAK 25/16 for aluminium/ copper conductors	080150-0-3	HLAK 25/16 5L G	1/12	4051589015035
	080150-1-3	HLAK 25/16 3L G/N/PE	1/12	4051589015134
	080150-3-3	HLAK 25/16 PE/3L G/N	1/12	4051589015332
	080150-5-3	HLAK 25/16 PE/3L BSG/N	1/12	4051589015530

* Other colours/colour combinations available on request

For copper conductors (Cu)



NOMINAL VOLTAGE

1000 V AC/DC
690 V

NOMINAL CURRENT

152 A
100 A

STANDARDS


IEC 60947-7-1
DIN VDE 0603-2



Model	Part No. *	Type	PU	GTIN / EAN
HLAK 25/16 for copper conductors	080150-0-4	HLAK 25/16 5L G	1/12	4051589801508
	080150-1-4	HLAK 25/16 3L G/N/PE	1/12	4051589801515
	080150-3-4	HLAK 25/16 PE/3L G/N	1/12	4051589801539
	080150-5-4	HLAK 25/16 PE/3L BSG/N	1/12	4051589801553

* Other colours/colour combinations available on request

Power loss HLAk 25/16

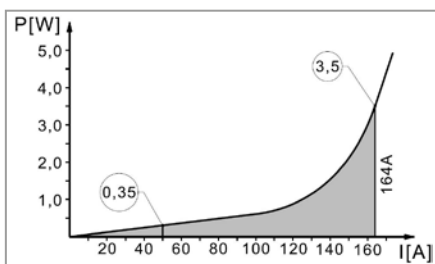

Dimensions:

