

HLAK 25D TYPE C - 1 POLE



080120-0-X

MAIN LINE

4 x 25 mm² - 2,5 mm² (4 - 14 AWG)
16 mm² - 1,5 mm² (6 - 16 AWG)



- > modular system
- > user-defined stackable
- > to fit on DIN rail TS 35

BRANCH LINE

4 x 16 mm² - 2,5 mm² (6 - 14 AWG)
10 mm² - 1,5 mm² (8 - 16 AWG)



080120-1-X



080120-2-X



080120-3-X



080120-4-X



HLAK

AL / CU

FOR ALUMINIUM AND COPPER CONDUCTORS (AL/CU)



NOMINAL VOLTAGE

1000 V AC/DC
1000 V AC/DC
600 V

NOMINAL CURRENT

152 A Cu
100 A Al
90 A Cu / 70 A Al

STANDARDS

IEC 60947-7-1
IEC 61238-1 (Class A)
UL-1059 / CSA C22.2 No.158-10



Model	Part No. *	Type	PU	GTIN / EAN
HLAK 25/16-D for aluminium/ copper conductors	080120-0-3	HLAK 25/16-D L G	2/36	4051589012034
	080120-1-3	HLAK 25/16-D N	2/36	4051589012133
	080120-2-3	HLAK 25/16-D PE	2/36	4051589012232
	080120-3-3	HLAK 25/16-D L B	2/36	4051589012331
	080120-4-3	HLAK 25/16-D S	2/36	4051589012430

* Other colours available on request

FOR COPPER CONDUCTORS (CU)



NOMINAL VOLTAGE

1000 V AC/DC
690 V

NOMINAL CURRENT

152 A
100 A

STANDARDS


IEC 60947-7-1
DIN VDE 0603-2



Model	Part No. *	Type	PU	GTIN / EAN
HLAK 25/16-D for copper conductors	080120-0-4	HLAK 25/16-D L G	2/36	4051589801201
	080120-1-4	HLAK 25/16-D N	2/36	4051589801218
	080120-2-4	HLAK 25/16-D PE	2/36	4051589801225
	080120-3-4	HLAK 25/16-D L B	2/36	4051589801232
	080120-4-4	HLAK 25/16-D L S	2/36	4051589801249

* Other colours available on request

Power loss HLA 25/16-D

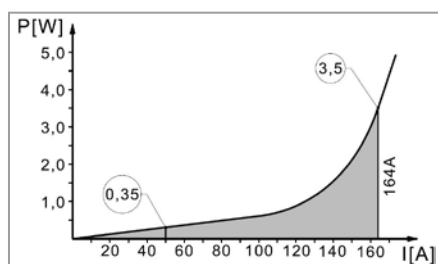

Dimensions:

