

MAIN LINE BRANCH TERMINALS (HLAK)

HLAK 35D Type C - 1 pole



080220-0-X

MAIN LINE

4 x 35 mm² - 4 mm²
25 mm² - 2,5 mm²



BRANCH LINE

4 x 25 mm² - 2,5 mm²
16 mm² - 1,5 mm²



- > modular system
- > user-defined stackable
- > to fit on DIN rail TS 35



AL / CU



080220-1-X



080220-2-X



080220-3-X



080220-4-X

For aluminium and copper conductors (Al/Cu)



NOMINAL VOLTAGE

1000 V AC/DC
1000 V AC/DC

NOMINAL CURRENT

428 A Cu
125 A Al

STANDARDS

IEC 60947-7-1
IEC 61238-1 (Class A)



Model	Part No. *	Type	PU	GTIN / EAN
HLAK 35/25-D for aluminium/ copper conductors	080220-0-3	HLAK 35/25-D L G	2/24	4051589022033
	080220-1-3	HLAK 35/25-D N	2/24	4051589022132
	080220-2-3	HLAK 35/25-D PE	2/24	4051589022231
	080220-3-3	HLAK 35/25-D L B	2/24	4051589022330
	080220-4-3	HLAK 35/25-D L S	2/24	4051589022439

* Other colours available on request

For copper conductors (Cu)



NOMINAL VOLTAGE

1000 V AC/DC
690 V

NOMINAL CURRENT

428 A
125 A

STANDARDS


IEC 60947-7-1
DIN VDE 0603-2



Model	Part No. *	Type	PU	GTIN / EAN
HLAK 35/25-D for copper conductors	080220-0-4	HLAK 35/25-D L G	2/24	4051589802208
	080220-1-4	HLAK 35/25-D N	2/24	4051589802215
	080220-2-4	HLAK 35/25-D PE	2/24	4051589802222
	080220-3-4	HLAK 35/25-D L B	2/24	4051589802239
	080220-4-4	HLAK 35/25-D L S	2/24	4051589802246

* Other colours available on request

Power loss HLAK 35/25-D

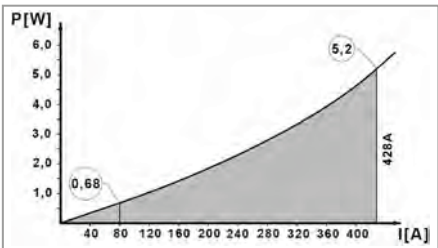

Dimensions:

