

MAIN LINE BRANCH TERMINALS (HLAK)

HLAK 70 Type C - 1 pole



080310-0-X

MAIN LINE

2 x 70 mm² - 10 mm² (2/0 - 8 AWG)
50 mm² - 6 mm² (1/0 - 10 AWG)



- > modular system
- > user-defined stackable
- > to fit on DIN rail TS 35

BRANCH LINE

2 x 50 mm² - 6 mm² (1/0 - 10 AWG)
35 mm² - 4 mm² (2 - 12 AWG)



AL / CU



080310-1-X



080310-2-X



080310-3-X



080310-4-X

For aluminium and copper conductors (Al/Cu)



NOMINAL VOLTAGE

1000 V AC/DC
1000 V AC/DC
600 V

NOMINAL CURRENT

300 A Cu
185 A Al
160 A Cu / 120 A Al

STANDARDS

IEC 60947-7-1
IEC 61238-1 (Class A)
UL-1059 / CSA C22.2 No.158-10



Model	Part No. *	Type	PU	GTIN / EAN
HLAK 70/50 for aluminium/ copper conductors	080310-0-3	HLAK 70/50 L G	3/36	4051589031035
	080310-1-3	HLAK 70/50 N	3/36	4051589031134
	080310-2-3	HLAK 70/50 PE	3/36	4051589031233
	080310-3-3	HLAK 70/50 L B	3/36	4051589031332
	080310-4-3	HLAK 70/50 L S	3/36	4051589031431

* Other colours available on request

For copper conductors (Cu)



NOMINAL VOLTAGE

1000 V AC/DC
690 V

NOMINAL CURRENT

300 A
160 A

STANDARDS


IEC 60947-7-1
DIN VDE 0603-2



Model	Part No. *	Type	PU	GTIN / EAN
HLAK 70/50 for copper conductors	080310-0-4	HLAK 70/50 L G	3/36	4051589803106
	080310-1-4	HLAK 70/50 N	3/36	4051589803113
	080310-2-4	HLAK 70/50 PE	3/36	4051589803120
	080310-3-4	HLAK 70/50 L B	3/36	4051589803137
	080310-4-4	HLAK 70/50 L S	3/36	4051589803144

* Other colours available on request

Power loss HLA 70/50

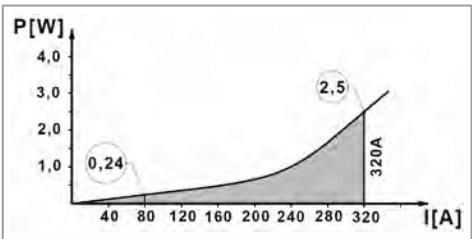

Dimensions:

